


COM 20 Column loudspeakers



FREQUENCY DIAGRAMS

TECHNICAL SPECIFICATIONS	
Rated power	20 W
Transformer power taps	20 W – 10 W
Sensitivity (1 m/1 W)	92 dB
Maximum SPL	105 dB
Frequency response	100 Hz – 15 kHz
Dispersion at 1000 Hz, degrees	180° (H) × 150° (V)
Protection	IP 54
Driver dimensions	2 × 5" (120 mm)
Dimensions	378 mm × 151 mm × 125 mm
Weight	2,9 kg
Material	Aluminum
Colour	Grey (RAL 7038)

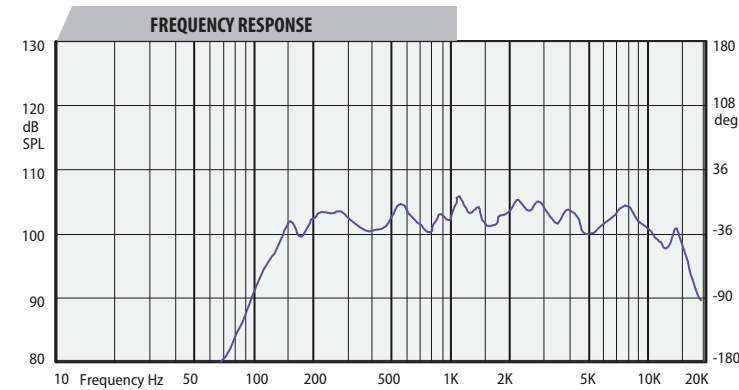

HORIZONTAL / VERTICAL POLAR DIAGRAMS

